

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (1/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 3851US (98-1107)

First Inventor or Application Identifier Zhongyi Xia

Title INTEGRATED FIELD EMISSION ARRAY SENSOR, DISPLAY, AND TRANSMITTER, APPARATUS INCLUDING SAME, AND METHODS

Express Mail Label No. EL312578973US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification [Total Pages 24]
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 6]

4. Oath or Declaration [Total Pages]

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- 8. ☐ Assignment Papers (cover sheet & document(s))
- 9. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- 10. ☐ English Translation Document (if applicable)
- 11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
- 12. ☐ Preliminary Amendment
- 13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- 14. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
- 15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
- 16. ☐ Other:

* A new statement is required to be entitled to pay small entity fees, except where one has been filed in a prior application and is being relied upon.

17. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____

Prior application information: Examiner _____ Group / Art Unit: _____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label or ☒ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name Brick G. Power
Trask, Britt & Rossa

Address P.O. Box 2550

City Salt Lake City

State

Utah

Zip Code

84110

Country U.S.A.

Telephone

(801) 532-1922

Fax

(801) 531-9168

Name (Print/Type) Brick G. Power

Registration No. (Attorney/Agent)

38,581

Signature

Brick G. Power

Date

08/31/99

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

PATENT
Attorney Docket 3851US (98-1107)

NOTICE OF EXPRESS MAILING

Express Mail Mailing Label Number: EL312578973US

Date of Deposit with USPS: August 31, 1999

Person making Deposit: Jared Turner

APPLICATION FOR LETTERS PATENT

for

**INTEGRATED FIELD EMISSION ARRAY SENSOR, DISPLAY, AND
TRANSMITTER, APPARATUS INCLUDING SAME, AND METHODS**

Inventor:
Zhongyi Xia

Attorneys:
Brick G. Power
Registration No. 38,581
James R. Duzan
Registration No. 28,393
TRASK, BRITT & ROSSA
P.O. Box 2550
Salt Lake City, Utah 84110
(801) 532-1922

693666-0349
693666-0349

INTEGRATED FIELD EMISSION ARRAY SENSOR, DISPLAY, AND TRANSMITTER, APPARATUS INCLUDING SAME, AND METHODS

BACKGROUND OF THE INVENTION

Field of the Invention: The present invention relates to an integrated apparatus that senses or detects electromagnetic radiation and displays the sensed or detected radiation. Particularly, the present invention relates to an apparatus that senses or detects electromagnetic radiation of visible or near infrared wavelengths and that displays the sensed or detected radiation in the form of a visible image. More particularly, the present invention relates to an apparatus that senses or detects electromagnetic radiation, displays an image representative of the sensed or detected radiation, and transmits signals representative of the detected radiation. The present invention also relates to devices that include the inventive apparatus.

Background of Related Art: Semiconductor devices, such as charge coupled devices ("CCDs") have long been employed to detect radiation, such as electromagnetic radiation. Charge coupled devices typically include an array of pixels, each of which includes an n-well, which is a region of n-type or n-doped silicon, in a p-type, or p-doped, silicon substrate. N-type semiconductor regions are typically relatively negatively electrically charged and conduct current by means of electrons. P-type semiconductor regions are relatively positively electrically charged and conduct current by means of electron hole pairs. The junction between the p-type substrate and the n-well, which is also referred to as a p-n junction or as a depletion region, typically has little or no mobile electrical charge. As radiation (e.g., photons) impinges the p-n junction, electron-hole pairs proportionate to the amount of radiation are created therein. Stated another way, as the p-n junction of a pixel is irradiated, electrons, or electrical impulses, move from the p-n junction into the adjacent n-well of the pixel.

Since the p-n junctions of charge coupled devices convert radiation to an electrical signal, charge coupled devices have been employed to detect radiation (e.g., electromagnetic radiation), and to transmit electrical signals representative of the detected radiation by means of circuitry associated with the pixels of these charge

coupled devices. Accordingly, charge coupled devices have been used in various image detection applications, such as in digital cameras.

Some field emission arrays similarly include a p-type silicon substrate with relatively electrically conductive n-wells extending therethrough and, therefore, p-n junctions. Field emission arrays have conventionally been employed in association with cathodo-luminescent display panels, in the form of field emission displays ("FEDs"), in order to display images.

Typically, the field emission array of a field emission display includes an array of emission pixels, each of which includes one or more substantially conical emitter tips. Each of the emitter tips is electrically connected to a relatively negative voltage source, or an electron source, by means of a cathode conductor line, which is also typically referred to as a column line.

Another set of electrically conductive lines, which are typically referred to as row lines or as gate lines, extend over the emission pixels of the field emission array. Row lines typically extend across a field emission display substantially perpendicularly to the direction in which the column lines extend. Accordingly, the paths of a row line and of a column line typically cross proximate (above and below, respectively) the location of one or more emitter tips. The row lines of a field emission array are electrically connected to a relatively positive voltage source. Thus, as a voltage is applied across both the column line and the row line that intersect at one or more emission pixels, electrons are emitted by the emitter tips of those emission pixels and accelerated through an opening in the row line.

As electrons are emitted by emitter tips and accelerate past the row line that extends over the emission pixel, the electrons are directed toward a corresponding display pixel of a positively charged cathodo-luminescent panel of the field emission display, which is spaced apart from and substantially parallel to the field emission array. As electrons impact a display pixel of the cathodo-luminescent panel, the display pixel is illuminated. The degree to which the display pixel is illuminated depends upon the number of electrons that impact the display pixel.

As the field emission array and its associated cathodo-luminescent display are both generally planar structures and are disposed relatively close to one another, the field emission display ("FED") devices of which the field emission array and cathodo-luminescent display are a part are typically relatively thin, flat devices. Thus, field emission displays are compact relative to display devices that include cathode ray tubes, and have found widespread use in many types of portable electronic devices, such as portable computers and video cameras, or "camcorders".

Field emission arrays have also been employed to detect radiation (e.g., electromagnetic radiation of a visible wavelength or electrons) and to transmit electrons representative of the detected radiation. Exemplary devices which employ field emission arrays in such a manner are disclosed in United States Patent 3,466,485 (hereinafter "the '485 Patent"), issued to John R. Arthur, Jr. et al. on September 9, 1969; United States Patent 3,814,968 (hereinafter "the '968 Patent"), issued to Harvey C. Nathanson et al. on June 4, 1974; United States Patent 5,804,833 (hereinafter "the '833 Patent"), issued to Roger Stettner et al. on September 8, 1998; and United States Patent 5,818,500 (hereinafter "the '500 Patent"), issued to Jon K. Edwards et al. on October 6, 1998.

The '485 Patent discloses a light sensitive field emission array with emitter tips that intensify a detected light image. As light is directed toward the back side of the field emission array, photons create current in the emitter tips corresponding to the areas of the back side upon which light is directed.

The '968 Patent discloses a radiation sensitive field emission array that is similar to that disclosed in the '485 Patent. The emitter tips of the field emission array of the '968 Patent emit electrons in response to an input radiation, such as light or electrons. The emitted electrons are directed to a display screen that displays the detected image.

The field emission array of the '833 Patent detects and displays images in a similar manner. In addition to detecting and displaying visible light images, however, the field emission array of the '833 Patent can also detect electromagnetic radiation wavelengths from visible light up to far infrared wavelengths (i.e., from about 300 nm up to about 1×10^6 nm) and display images representative of electromagnetic radiation of

these wavelengths. Applicable uses of such a field emission array would be in so-called "night vision" applications.

These patents do not, however, disclose field emission arrays that include components that transmit signals representative of the detected images. Thus, the radiation-sensitive field emission arrays of these patents may not be employed to detect radiation, to display images representative of the radiation, and to substantially simultaneously transmit signals representative of the radiation to another source, such as to recording componentry.

Accordingly, there is a need for a field emission array that detects radiation and substantially simultaneously displays an image representative of the detected radiation and transmits detectable signals representative of the radiation. A relatively compact apparatus that detects radiation and displays images and transmits signals that are representative of the radiation is also needed.

SUMMARY OF THE INVENTION

The integrated field emission array sensor, display, and transmitter of the present invention includes a field emission array having a semiconductor substrate with an array of n-wells and, thus, p-n junctions defined therein, an array of emitter tips adjacent and corresponding to the p-n junctions, and circuitry associated with each pixel of the array.

The field emission array substrate is preferably a semiconductive material, such as silicon. The substrate may be p-type or p-doped semiconductor material, and therefore conducts current by means of electron hole pairs (i.e., the p-type semiconductor material is relatively electron deficient).

Regions of conductively doped n-type semiconductive material, which are referred to herein as n-type semiconductor wells or simply as n-wells, are defined in the substrate. These n-wells may comprise the column lines of a field emission array. N-type semiconductive materials conduct current by means of the free electrons of a dopant material.

The interface between each n-well and the p-type semiconductor substrate of the field emission array defines a so-called "p-n junction" or "n-p junction". A depletion

region, which includes relatively non-charged materials, exists at the p-n junction. Thus, as is known in the art, a contact potential exists at the p-n junction.

The back side of the substrate (i.e., p-type semiconductor material) of the field emission array comprises a radiation detection surface, which is also referred to herein as a detection surface, as a sensor surface, or as a radiation sensitive surface. As radiation such as photons (i.e., quanta of electromagnetic radiation) enter a pixel through the radiation detection surface, the radiation impedes a p-n junction of the field emission array, and electron hole pairs are created in the p-n junction.

As electron hole pairs are created in the p-n junction, a substantially proportionate number of electrons move into the n-well from the p-n junction. Thus, the voltage of the n-well decreases. The radiation detection surface is preferably shielded from further radiation until a signal representative of the radiation incident with the pixel has been transmitted.

Each pixel of the inventive apparatus includes a signal transmission circuit associated with the n-well of that pixel. The signal transmission circuit includes a capacitor, a first side of which communicates with the n-well and a second side of which is a source node of a first transistor or otherwise communicates with a source node of the first transistor. The drain node of the first transistor communicates with a baseline potential (V_{DD}). A second transistor shares a source node with the first transistor. The drain node of the second transistor communicates with a scan circuit of a type known in the art, such as the circuits employed in digital cameras.

As the voltage of the n-well of an emission pixel decreases, the voltage of the n-well is communicated to the first side of the capacitor. As the source node of the first transistor and, thus, the second side of the capacitor, is preferably charged to the baseline potential, the voltage at the second side of the capacitor and, thus, the voltage of the source node of the second transistor drops until it is substantially the same as the voltage of the n-well. Upon turning the second transistor "on" (i.e., upon opening the gate of the second transistor), the voltage is transferred to the drain node of the second transistor. The voltage of the second transistor, which is now substantially representative of the amount and type of radiation that impinged the p-n junction of the emission pixel, may

then be measured by the scan circuit that communicates with the drain node of the second transistor. Upon turning the gate of the second transistor "off", the source node of the second transistor is electrically isolated from the voltage of the n-well. A value representative of the voltage measured by the scan circuit at the drain node of the second transistor, which represents the radiation detected by the emission pixel, may then be stored, as known in the art.

Each emission pixel of the field emission array further includes at least one emitter tip that protrudes from an emission surface of the field emission array located opposite the detection surface. The emission pixels are preferably disposed substantially over and in communication with the associated n-wells of the field emission array.

As the gate of the first transistor is opened, the source node of the first transistor and, thus, the second side of the capacitor, is charged to the baseline potential (V_{DD}). As a relatively positive voltage is applied to a conductive member of an extraction grid, or grid anode, overlying the emission pixel, due to the potential difference between the grid anode and the emitter tip, electrons may be drawn from the n-well, into the associated emitter tip, and emitted from the emitter tip. As the electrons are emitted from the emitter tip and through the extraction grid, they are directed toward a corresponding display pixel of an cathodo-luminescent display and illuminate the same in a manner that represents the wavelength or intensity of radiation that impinged the emission pixel that corresponds to the display pixel upon impinging the display pixel. The n-well will then return substantially to the baseline potential. Another image may be detected and a representative signal transmitted by exposing the radiation detection surface to radiation, closing the gate of the first transistor, and repeating the process.

Other features and advantages of the present invention will become apparent to those of ordinary skill in the art through consideration of the ensuing description, the accompanying drawings, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic representation of a field emission array according to the present invention;

FIG. 1A is a schematic representation of a field emission array according to the present invention, which includes a detection enhancement material to facilitate the detection infrared and longer wavelengths of electromagnetic radiation;

FIG. 2 schematically illustrates a circuit including transistors that may be employed in the field emission array according to the present invention;

FIG. 2A schematically illustrates a variation of the circuit depicted in FIG. 2, which includes a switch between the n-well and the capacitor;

FIG. 3 is a flow chart that illustrates the method of the present invention;

FIG. 4 is a schematic representation of a system wherein a field emission array according to the present invention is employed to detect radiation, to display images representative of the detected radiation; and to transmit signals representative of a magnitude or amount and a wavelength or type of the detected radiation; and

FIGs. 5A and 5B are front and rear schematic representations, respectively, of a video camera including a field emission array according to the present invention which depicts the use thereof to detect radiation, to display images representative of the detected radiation, and to transmit and record signals representative of the detected radiation.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates an emission pixel 14 of a preferred embodiment of a field emission array 10 according to the present invention, which includes a p-type semiconductor substrate 12, such as p-type silicon, with an array of emission pixels 14 and a signal transmission circuit 26 associated with each emission pixel 14.

Each emission pixel 14 includes a region of n-type semiconductor material, which is also referred to herein as an n-well 16, such as n-type silicon, proximate an active surface of substrate 12. The interface between each n-well 16 and the surrounding p-type semiconductor material of substrate 12 defines a p-n junction 17. Preferably, the thickness D of, or shortest distance across, the p-type region of substrate 12 between each n-well 16 and the back side of substrate 12 facilitates the creation of electron hole pairs as radiation, such as photons of electromagnetic radiation, impinge p-n junction 17.

The thickness D between the back side of substrate 12 and n-well 16 preferably facilitates the generation of electron-hole pairs in p-n junction 17 by visible wavelengths of electromagnetic radiation (i.e., visible light). Thickness D may facilitate the generation of electron hole pairs in p-n junction 17 by infrared or other wavelengths of electromagnetic radiation.

Field emission array 10 also includes at least one emitter tip 18 associated with each n-well 16. Each emitter tip 18 is laterally surrounded by and, preferably, at least partially spaced apart from a layer 20 of dielectric material. An extraction grid 22, which is fabricated from an electrically conductive material, is disposed over layer 20 and, therefore, over a surface of field emission array 10. Apertures 24 formed through extraction grid 22 are located substantially above each emitter tip 18.

With continued reference to FIG. 1, the signal transmission circuit 26 associated with each emission pixel 14 includes a first transistor 28, or baseline potential transistor, which is illustrated in phantom since transistor 28 extends into or out of the plane of the page, and a second transistor 30, which is also referred to herein as a signal transmission transistor. First transistor 28 and second transistor 30 may share an n-well 32, which acts as the drain 34, or drain node, of both first transistor 28 and second transistor 30. First transistor 28 also includes a gate 36 and a source 38, or source node, both of which are illustrated in phantom. Source 38 may communicate with a drain voltage, V_{DD} . Second transistor 30 includes a gate 40 and a source 42, which is also referred to herein as a source node. Source 42 communicates with a scan circuit 44 of a type known in the art.

Although second transistor 30 is illustrated as a metal-oxide-semiconductor field-effect transistor ("MOSFET"), which is a type of insulated-gate field-effect transistor ("IGFET"), other types of transistors, such as a junction field-effect transistor ("JFET") may also be employed as second transistor 30. Similarly, first transistor 28 may comprise an IGFET, a JFET, or any other type of transistor.

A capacitor 46 disposed between n-well 16 and signal transmission circuit 26 facilitates the generation of a current through signal transmission circuit 26. Capacitor 46 includes a first conductive structure 48, which is a conductive contact disposed in contact with the n-well 16 of emission pixel 14, a second conductive component 52, and a

dielectric component 50, such as a glass or an oxide, disposed between first conductive component 48 and second conductive component 52.

The various components of field emission array 10, including n-wells 16, emitter tips 18, capacitor 46, and signal transmission circuit 26, may be fabricated by known semiconductor device fabrication techniques.

With reference to FIGs. 2 and 3, and with continued reference to FIG. 1, a preferred embodiment of the radiation detection, display, and signal transmission process of the present invention is depicted. FIG. 2 is a schematic representation of the circuit defined by n-well 16, capacitor 46, and signal transmission circuit 26. FIG. 3 is a flow chart illustrating an image sensing, display, and signal transmission process according to the present invention.

While the processes of the present invention are occurring, an appropriate voltage or voltages are applied, at reference 100 of FIG. 3, to all of the components of the circuit, including extraction grid 22, the ground reference of the circuit, the substrate bias of the circuit, the circuit voltage, and the cathodo-luminescent display panel 66 (*see* FIG. 4), if any, is biased at a substantially constant, relatively positive voltage.

The n-well 16 and drain 34 of an emission pixel 14 are each charged to a baseline potential. Accordingly, the back side 13 of substrate 12 at emission pixel 14 is shielded from radiation, such as by a shutter 54. Alternatively, with reference to FIG. 2A, field emission array 10 may include a shutter 45. At reference 101 of FIG. 3, gate 36 of first transistor 28 is turned “on” while the back side 13 of substrate 12 at emission pixel 14 is shielded from radiation. Alternatively, with reference again to FIG. 2A, gate 36 of first transistor 28 may be turned “on” while shutter 45 of FIG. 2A is in the closed position. Shielding back side 13 or closing shutter 45 permits n-well 16 to return to its original, or base, voltage, prior to detecting radiation R from a portion of an object O. This original voltage sets the voltage difference between grid 22 and emitter tips 18 below the threshold voltage that causes emitter tips 18 to emit electrons. Therefore, as shutter 45 is closed, emitter tips 18 do not emit electrons. As gate 36 of first transistor 28 is turned “on”, at reference 101 of FIG. 3, a substantially constant drain source voltage, which

comprises the baseline potential (V_{DD}), is transferred from source 38 of first transistor 28 to drain 34. Gate 36 is then turned “off”, at reference 102 of FIG. 3.

At reference 104 of FIG. 3, the back side of substrate 12 is exposed to radiation, which impinges p-n junction 17, creating electron-hole pairs representative of the intensity or type of radiation therein and causing electrons to be transferred to n-well 16. Thus, as radiation impinges p-n junction 17, the voltage of n-well 16 drops, or decreases, to create a voltage difference between grid 22 and emitter tips 18, thereby facilitating the emission of electrons from emitter tips 18. Changes in the voltage of n-well 16 are communicated to first conductive component 48 of capacitor 46, at reference 104 of FIG. 3. Thus, the voltage of n-well 16 and any changes in the voltage thereof may be communicated to a first side of capacitor 46.

As the voltage on the n-well 16 side of capacitor 46, at first conductive component 48, drops, the voltage on the drain 34 side of capacitor 46, at second conductive component 52, substantially correspondingly drops. Capacitor 46 stores the voltage of drain 34 until gate 40 of second transistor 30 is turned “on”, at reference 106 of FIG. 3. As gate 40 of second transistor 30 is turned “on”, the reduced voltage of drain 34 is communicated or transferred to source 42 of transistor 30, which may be scanned, at reference 108 of FIG. 3, to determine the intensity or type of radiation incident with emission pixel 14.

At reference 110 of FIG. 3, gate 40 may be turned “off” while the back side 13 of substrate 12 at emission pixel 14 remains shielded from radiation. Gate 36 of first transistor 28 is turned “on” to charge drain 34 back to V_{DD} , which permits n-well 16 to return substantially to its original, baseline potential.

The process may then be repeated to detect, display, and transmit a signal representative of subsequent radiation “images”. Gate 36 of first transistor 28 may be turned “off” and radiation permitted to impinge the back side 13 of substrate 12 at emission pixel 14, at reference 102 of FIG. 3, to facilitate the sensing or detecting of another image of radiation by emission pixel 14 and the transmission of a signal representative of the radiation through second transistor 30.

As the apparatus of present invention comprises a field emission array having an array of n-wells, each of the n-wells preferably has a signal transmission circuit associated therewith. Accordingly, radiation may be detected by each n-well of the apparatus, or by each emission pixel thereof, and signals representative of the radiation detected at each of the pixels may be transmitted to a scan circuit, or image processing circuit, of a type known in the art, associated with each of the signal transmission circuits. The scanned and processed data may then be recorded by known processes.

With reference to FIG. 4, a system 60 is shown, which includes field emission array 10, a scan circuit 62 associated with field emission array 10, a processor 63 in communication with scan circuit 62, a recording mechanism 64 in communication with processor 63, a substantially flat display panel 66, or cathodo-luminescent display, spaced apart from field emission array 10 in substantially mutually parallel relation therewith, and other components, as known in the art.

Scan circuit 62 is preferably an image signal detector of a type known in the art, which detects or measures the charge or potential at source 42 (*see* FIGS. 1 and 2) of the second transistor 30 of each of the emission pixels 14 of field emission array 10. Processor 63, which is preferably of a type known in the art, communicates with scan circuit 62 to convert the voltage measured at each emission pixel 14 to data representative of the wavelength or the intensity of the radiation impinging emission pixel 14. Recording mechanism 64, which is also preferably of a type known in the art, communicates with processor 63 and records or stores the data representative of the wavelength or intensity of radiation impinging emission pixel 14 along with the location of the emission pixel 14 from which the data was obtained.

Display panel 66 includes an array of display pixels 68, each of which are positioned to correspond to an emission pixel 14 of field emission array 10. In use, cathodo-luminescent display panel 66 is charged to a relatively positive attraction potential, which is greater than the relatively positive potential of extraction grid 22 so as to attract electrons emitted from the emitter tips 18 of field emission array 10, and which generates image light as electrons are attracted thereto.

FIG. 4 depicts the detection of electromagnetic radiation of or reflected by an object O and the display of an image I of object O by system 60. Preferably, electromagnetic radiation from object O is focused on back side 13 of substrate by one or more optical lenses (*see, e.g.*, optical lens 72 in FIGs. 1 and 5B). As back side 13 (see FIG. 1) of substrate 12 is exposed to electromagnetic radiation from object O, emission pixels 14 are exposed to different wavelengths and intensities of electromagnetic radiation from the different portions of object O to which each emission pixel 14 is exposed.

The wavelength and intensity of the radiation from each portion of object O impinging a corresponding emission pixel 14 of field emission array 10 is translated to a corresponding electrical impulse in the manner described in reference to FIGs. 2 and 3. These electrical impulses are measured by a scan circuit 62 of a type known in the art. Processor 63 processes the measurements taken by scan circuit 62, which may be recorded for each of the emission pixels 14 of field emission array 10 by recording mechanism 64, as known in the art. Thus, recording mechanism 64 stores an array of information representative of the radiation from object O to which back side 13 of substrate 12 of field emission array 10 is exposed.

The emitter tip or tips 18 of each emission pixel 14 emit electrons in a manner that represents the wavelength and the intensity of the portion of radiation from object O to which emission pixel 14 is exposed. These electrons are emitted upon application of a relatively positive potential to extraction grid 22, as described above in reference to FIGs. 2 and 3. Thus, electrons representative of object O are emitted from the emission pixels 14 of field emission array 10 as emission pixels 14 are exposed to radiation from object O. These emitted electrons impinge display pixels 68 of display 66, eliminating display pixels 68 that correspond to emission pixels 14 that have been exposed to a portion of the radiation from object O. Thus, display 66 displays an image I representative of object O.

As an alternative to or in combination with recording mechanism 64, system 60 may include an image transmission mechanism of a type known in the art, which transmits signals representative of radiation from object O to a storage device, an output

device, a processor, or another device which may store, process, interpret, or otherwise utilize the signals of scan circuit 62.

Although system 60 is depicted in FIG. 4 as including a display 66 associated with field emission array 10, system 60 need not include such a display. If system 60 does not include display 66, image I may be displayed by other components associated with scan circuit 64.

System 60 may be employed to detect a series of images and measure the wavelengths and intensities of portions of each image of the series of images incident with each emission pixel 14 of field emission array 10. These measured wavelengths and intensities at each emission pixel 14 may be stored for each image of the series of images. Since scan circuit 62 identifies the emission pixel 14 that detects the radiation of a portion of an image, information representative of radiation impinging each emission pixel 14 of field emission array 10 is stored. Since this information may be stored on an image-by-image basis, a video representative of a series of images may be stored and played back. Thus, as shown in FIGs. 5A and 5B, the system 60 (*see* FIG. 4) of the present invention may be employed in a video camera 70. Of course, video camera 70 also includes one or more optical lenses 72 that focus electromagnetic radiation from an object O onto back side 13 of substrate 12 of field emission array 10 (*see* FIG. 1) and other components, as known in the art.

If field emission array 10 is capable of detecting infrared wavelengths of electromagnetic radiation, system 60 or an image detection system similar thereto may also be used in apparatus for detecting or displaying infrared images. For example, system 60 could be used in night-vision goggles.

A silicon substrate by itself has too high a band gap to detect longer wavelengths (e.g. 2,500 to 10,000 nm) of electromagnetic radiation. Accordingly, referring again to FIG. 1, field emission array 10 may optionally include a substrate 12 of low band gap material, which is also referred to herein as a "detection enhancement material," of a type known in the art to enhance detection of longer wavelengths of electromagnetic radiation by field emission array 10. Low band gap materials, such as mercury-cadmium-tellurium alloys and other materials having electrical characteristics that are more readily altered

than those of silicon by electromagnetic radiation of relatively long wavelengths, may be used as substrate 12 to facilitate the detection or display infrared radiation in thermal imaging applications or longer wavelengths of electromagnetic radiation. Detection enhancement materials such as mercury-cadmium-tellurium facilitate the detection by field emission array 10 of wavelengths of electromagnetic radiation of from about 1,000 nm to about 10,000 nm and greater.

Alternatively, with reference to FIG. 1A, a field emission array 10' configured to detect wavelengths of electromagnetic radiation that are longer than visible light can include a silicon substrate 12' with a p-type region 76 (e.g., p-type silicon) having a p-type conductivity and an n-type region 78 (e.g., n-doped silicon) having an n-type conductivity. A diffusion region 77, or p-n junction, is located between p-type region 76 and back side 13' of substrate 12' and is proximate to back side 13'. A coating 74, or layer, of detection enhancement material disposed on back side 13' proximate to diffusion region 77 facilitates the detection of radiation, the scanning of electrical impulses representative of the detected radiation, and the emission of electrons representative of the detected radiation in a manner similar to the detection, scanning, and emission effected by p-n junction 17 of semiconductor substrate 12. Alternative embodiments of field emission array 10', as well as examples of useful low band gap materials and dopant concentrations, are disclosed in U.S. patent application Serial No. 09/_____, the disclosure of which is hereby incorporated in its entirety by this reference.

Although the foregoing description contains many specifics and examples, these should not be construed as a limiting the scope of the present invention, but merely as providing illustrations of some of the presently preferred embodiments. Similarly, other embodiments of the invention may be devised which do not depart from the spirit or scope of the present invention. The scope of this invention is, therefore, indicated and limited only by the appended claims and their legal equivalents, rather than by the foregoing description. All additions, deletions and modifications to the invention as disclosed herein and which fall within the meaning of the claims are to be embraced within their scope.

CLAIMS

What is claimed is:

1. A video imaging system, comprising:
a field emission array including:
 - 5 a p-type substrate comprising an image detection surface;
 - an n-well recessed in said p-type substrate;
 - a diffusion region between said p-type substrate and said n-well;
 - at least one emitter tip disposed in communication with said n-well;
 - a capacitor, a first side of which is in communication with said n-well;
 - 10 a baseline potential transistor in communication with a second side of said capacitor; and
 - a signal transmission transistor in communication with said second side;
 - an image signal detector associated with said signal transistor; and
 - an extraction grid disposed over said field emission array and including at least one
15 aperture therethrough located substantially over said at least one emitter tip.
2. The video imaging system of claim 1, further comprising a cathodo-
luminescent display disposed substantially parallel to and spaced apart from said
extraction grid and including at least one display pixel corresponding to said at least one
20 emitter tip.
3. The video imaging system of claim 1, wherein said baseline potential
transistor and said signal transmission transistor share a common drain.
- 25 4. The video imaging system of claim 1, wherein a distance between said
image detection surface and said n-well facilitates detection of electromagnetic radiation
of a near infrared wavelength.

5. The video imaging system of claim 1, wherein a distance between said image detection surface and said n-well facilitates detection of electromagnetic radiation of a visible wavelength.

5 6. The video imaging system of claim 1, wherein said image signal detector is in communication with a source node of said signal transmission transistor.

7. The video imaging system of claim 1, further comprising a shutter component.

10 8. The video imaging system of claim 7, wherein said shutter component is configured to prevent electromagnetic radiation from impinging said n-well.

15 9. The video imaging system of claim 1, wherein said diffusion region is located proximate to said image detection surface and further comprising a layer of detection enhancement material adjacent said image detection surface.

20 10. The video imaging system of claim 9, wherein said detection enhancement material comprises a platinum silicide.

25 11. The video imaging system of claim 1, wherein said p-type substrate and said n-well each comprise a detection enhancement material.

12. The video imaging system of claim 11, wherein said detection enhancement material comprises a mercury-cadmium-tellurium alloy.

13. An image detection apparatus, comprising:
a p-type substrate comprising an emission surface, an array of n-type wells disposed in said p-type substrate substantially along a plane proximate said emission surface,

a p-n junction between said p-type substrate and each n-well of said array on n-type wells, and an image detection surface opposite said emission surface;
an array of emission pixels, each comprising at least one emitter tip protruding from said emission surface and in communication with a corresponding n-well of said array of n-type wells;
a capacitor in communication with selected n-wells of said array of n-type wells;
a signal transmission transistor in communication with said capacitor;
a baseline potential transistor in communication with said capacitor; and
an image signal detector in communication with said signal transmission transistor.

14. The apparatus of claim 13, wherein said signal transmission transistor and said baseline potential transistor share a drain node.

15. The apparatus of claim 13, wherein said image detector communicates with a source node of said signal transmission transistor.

16. The apparatus of claim 13, further comprising a shutter.

17. The apparatus of claim 16, wherein said shutter prevents electromagnetic radiation from penetrating selected n-wells of said array of n-type wells.

18. The apparatus of claim 16, wherein said shutter is positionable over a selected region of said image detection surface.

19. The apparatus of claim 13, wherein a distance between said image detection surface and an n-well of said array of n-type wells facilitates impingement of said p-n junction by electromagnetic radiation of an infrared or a near infrared wavelength.

20. The apparatus of claim 13, wherein a distance between said image detection surface and an n-well of said array of n-wells facilitates impingement of said p-n junction by electromagnetic radiation of a visible wavelength.

5 21. The apparatus of claim 13, further comprising a display disposed adjacent, substantially parallel to, and spaced apart from said emission surface.

10 22. The apparatus of claim 21, wherein said display comprises an array of display pixels, each display pixel of which corresponds substantially to at least one emission pixel of said array of emission pixels.

23. The apparatus of claim 21, wherein said display comprises a cathodo-luminescent display.

15 24. The apparatus of claim 13, wherein said p-n junction is located proximate to said image detection surface, said apparatus further comprising a layer of detection enhancement material adjacent said image detection surface.

20 25. The apparatus of claim 24, wherein said detection enhancement material comprises a platinum silicide.

26. The apparatus of claim 13, said p-type substrate and said array of n-type wells each comprise a detection enhancement material.

25 27. The apparatus of claim 26, wherein said detection enhancement material comprises a mercury-cadmium-tellurium alloy.

28. A method of detecting electromagnetic radiation and storing data representative of the electromagnetic radiation, comprising:

exposing a back side of a field emission array to the electromagnetic radiation to permit the electromagnetic radiation to impinge a p-n junction adjacent a selected n-well of said field emission array and to create electron-hole pairs in said p-n junction representative of a wavelength or an intensity of the electromagnetic radiation; permitting said p-n junction to emit electrons into said selected n-well; communicating an electrical charge created by said electrons to a first side of a capacitor; measuring a potential across said capacitor; communicating a baseline potential to a second side of said capacitor; and permitting a selected emitter tip corresponding to and in communication with said selected n-wells to emit electrons representative of said wavelength.

29. The method of claim 28, further comprising shielding said back side from the electromagnetic radiation.

30. The method of claim 28, further comprising re-exposing said back side to electromagnetic radiation.

31. The method of claim 28, further comprising storing a value representative of said potential across said capacitor.

32. The method of claim 28, wherein said exposing comprises focusing an image comprising of the electromagnetic radiation onto said back side.

33. The method of claim 28, wherein said exposing comprises directing said back side toward a source of electromagnetic radiation.

34. The method of claim 28, wherein said exposing comprises opening a shutter.

35. The method of claim 28, wherein said communicating said baseline potential to said second side facilitates said permitting said selected emitter tip to emit said electrons.

5 36. The method of claim 35, wherein said permitting said selected emitter tip to emit said electrons comprises applying a relatively positive voltage to regions of an extraction grid disposed substantially above said selected emitter tip.

10 37. The method of claim 36, further comprising illuminating at least one display pixel of a display, said at least one display pixel corresponding to said selected emitter tip.

15 38. A video camera, comprising:
a field emission array including a p-type substrate including an array of n-wells therein, said substrate having:
a plurality of emitter tips extending from an emission surface thereof, selected emitter tips of said plurality of emitter tips in communication with a corresponding n-well of said array of n-wells; and
a detection surface opposite said emission surface;
20 at least one signal transmission circuit in communication with selected n-wells of said array of n-wells;
an extraction grid adjacent said substrate and including an array of apertures therethrough, each aperture of said array of apertures corresponding to at least emitter tip of said plurality of emitter tips;
25 a display disposed parallel to and spaced apart from said extraction grid and including an array of cathodo-luminescent display pixels, selected display pixels of said display pixels corresponding to at least emitter tip of said plurality of emitter tips;
a scan circuit in communication with said at least one signal transmission circuit;
a decoder component in communication with said scan circuit; and
30 a recorder mechanism in communication with said decoder component.

39. The video camera of claim 38, wherein said at least one signal transmission circuit comprises:
a capacitor in communication with a corresponding n-well of said array of n-wells;
a baseline potential transistor in communication with said capacitor, opposite said
corresponding n-well; and
a signal transmission transistor in communication with said capacitor, opposite said
corresponding n-well.

40. The video camera of claim 39, wherein said baseline potential transistor and said signal transmission transistor share a drain.

41. The video camera of claim 39, wherein said baseline potential transistor is in communication with a baseline charge.

42. The video camera of claim 38, further comprising a shutter component.

43. The video camera of claim 42, wherein said shutter component is configured to prevent radiation detectable by said detection surface from impinging said detection surface.

44. The video camera of claim 38, wherein a distance between said detection surface and the n-wells of said array of n-wells facilitates the detection of electromagnetic radiation of a near infrared wavelength by p-n junctions adjacent selected n-wells of said array of n-wells.

45. The video camera of claim 38, wherein a distance between said detection surface and the n-wells of said array of n-wells facilitates the detection of electromagnetic radiation of a visible wavelength by p-n junctions adjacent selected n-wells of said array of n-wells.

ABSTRACT OF THE DISCLOSURE

An image detection apparatus including a field emission array and signal transmission circuits in communication with pixels of the field emission array. The field emission array includes a p-type substrate with an array of n-wells therein. Emitter tips, in communication with the n-wells, protrude from an emission surface of the p-type substrate. A detection surface of the p-type substrate is located opposite the emission surface thereof. Each signal transmission circuit of the field emission array includes a capacitor, a baseline potential transistor, and a signal transmission transistor. A first side of the capacitor communicates with a corresponding n-well of the field emission array. A second side of the capacitor communicates with the baseline potential transistor and the signal transmission transistor. The baseline potential transistor and the signal transmission transistor may share a drain. As radiation, such as visible light or near infrared radiation, impinges the detection surface of the field emission array, electron-hole pairs are created in p-n junctions between the p-type substrate and the n-wells. As a result, electrons are transferred from the impinged p-n junctions into the n-well adjacent thereto. The charge created in the n-well represents the intensity or wavelength of the radiation that has impinged the p-n junction. A signal representative of the wavelength or intensity of the impinging radiation is transmitted by the signal transmission circuit, and may be scanned by a scan circuit. Upon applying a relatively positive potential to an extraction grid associated with the field emission array, the excess electrons in n-wells may be emitted from an emitter tip adjacent the n-well. The emitted electrons may impinge a corresponding display pixel of a display so as to create a visible image thereon.

667630" 90698250

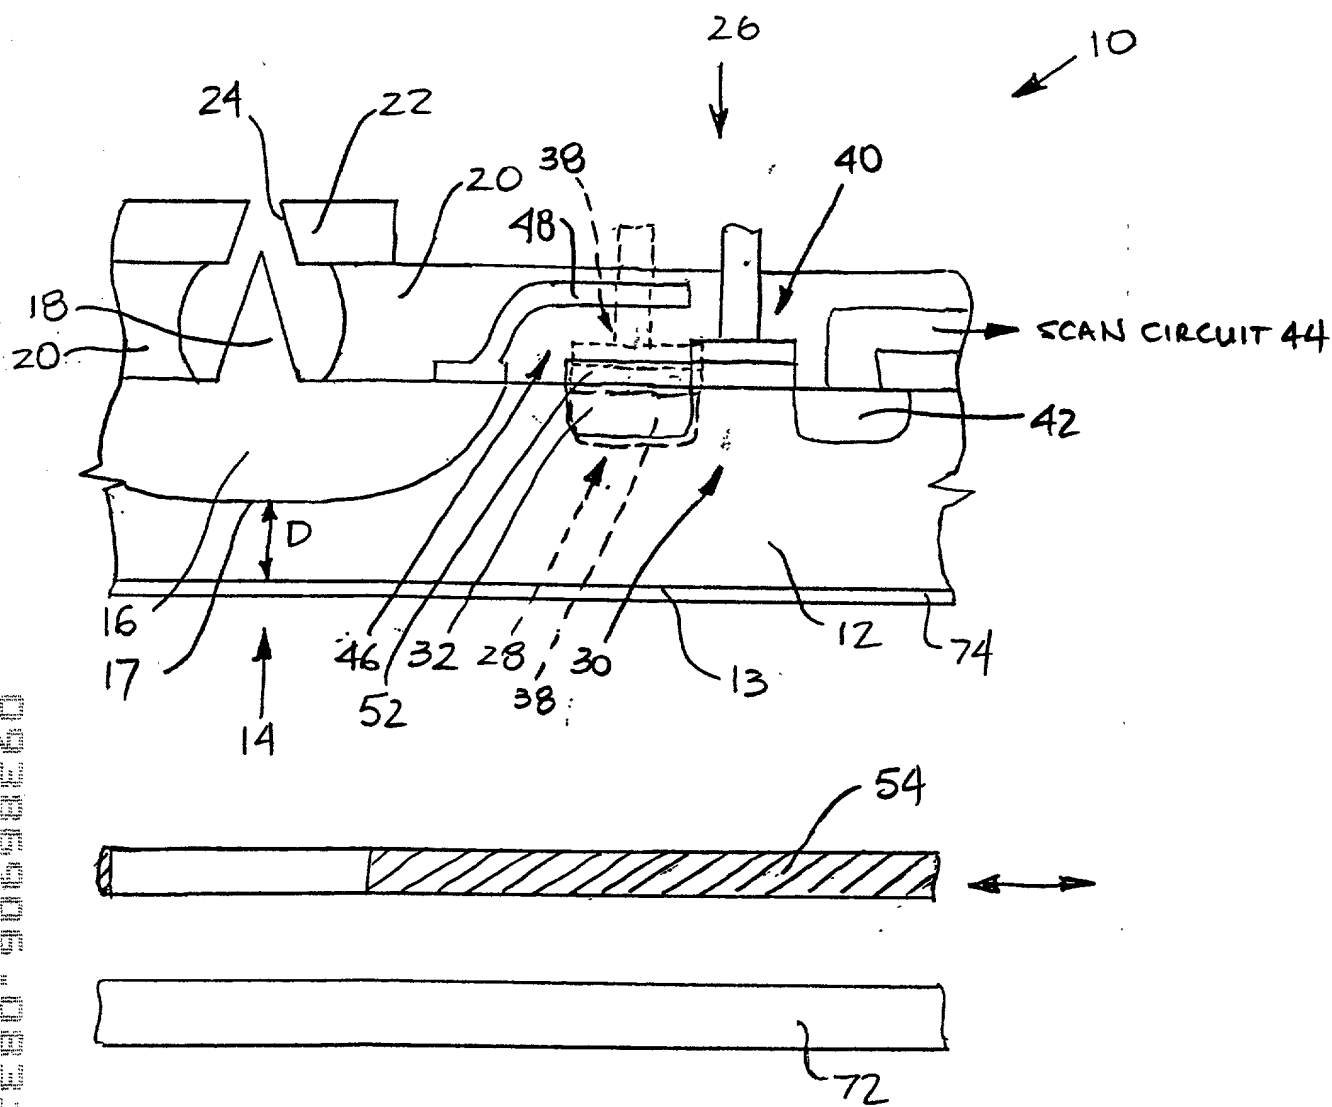


FIG. 1

667620" 90692260

101

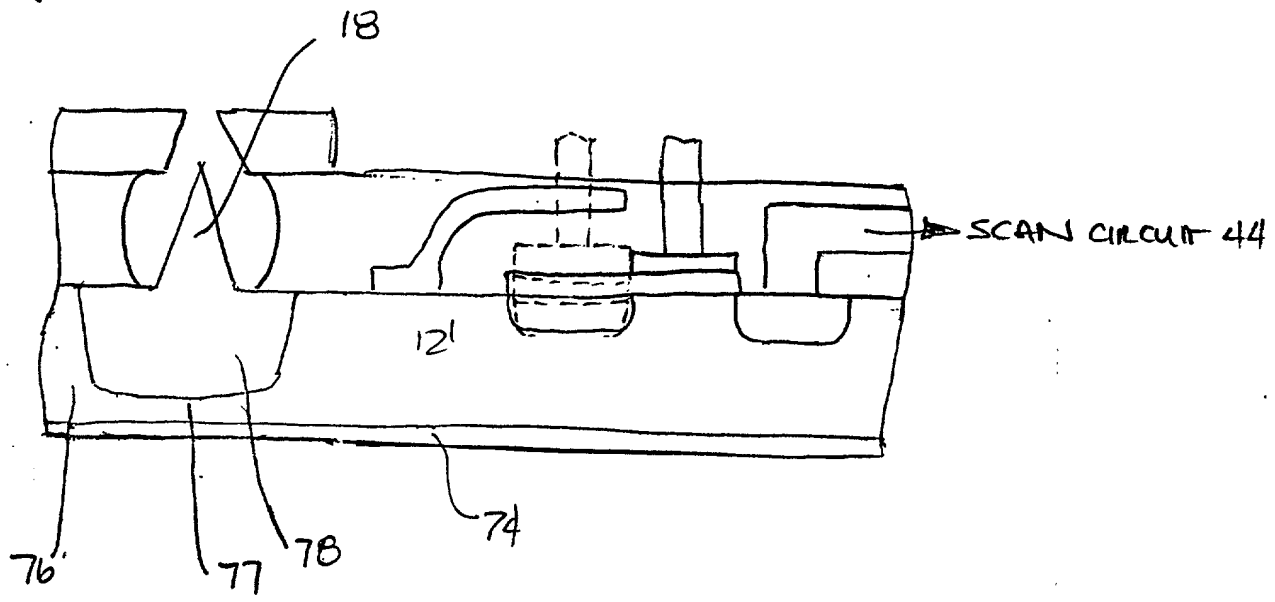


FIG. 1A

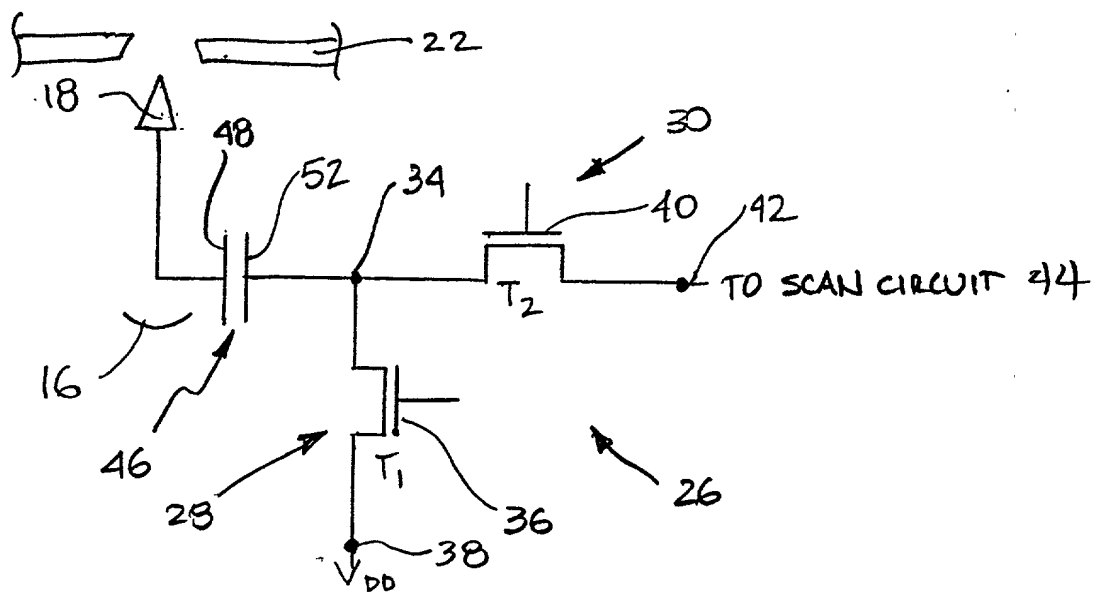


FIG. 2

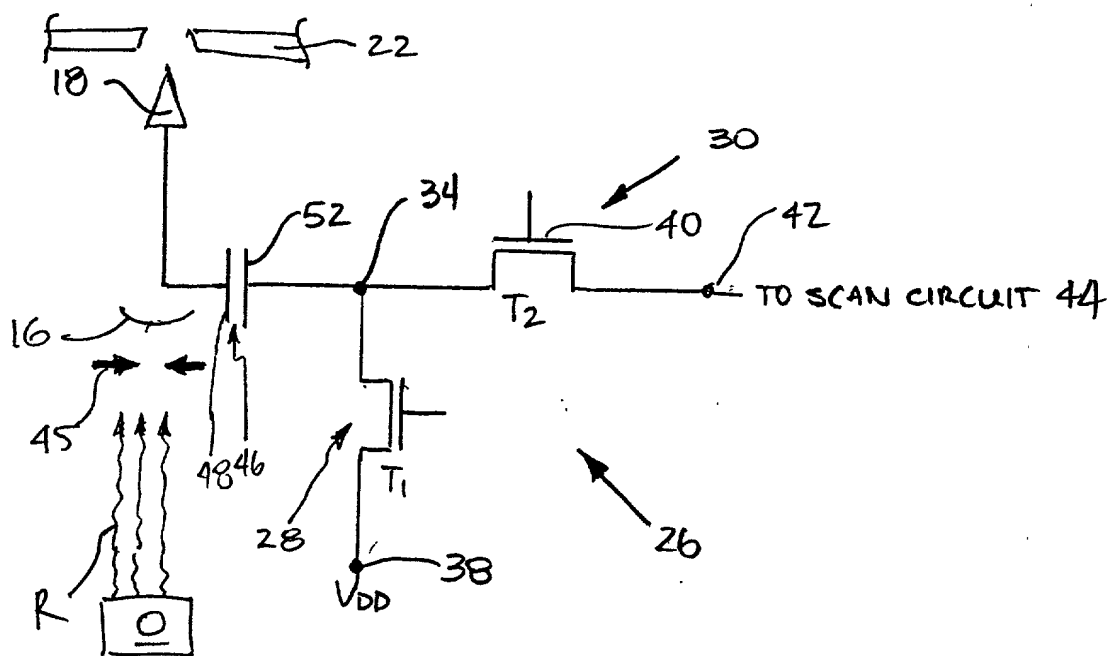


FIG. 2A

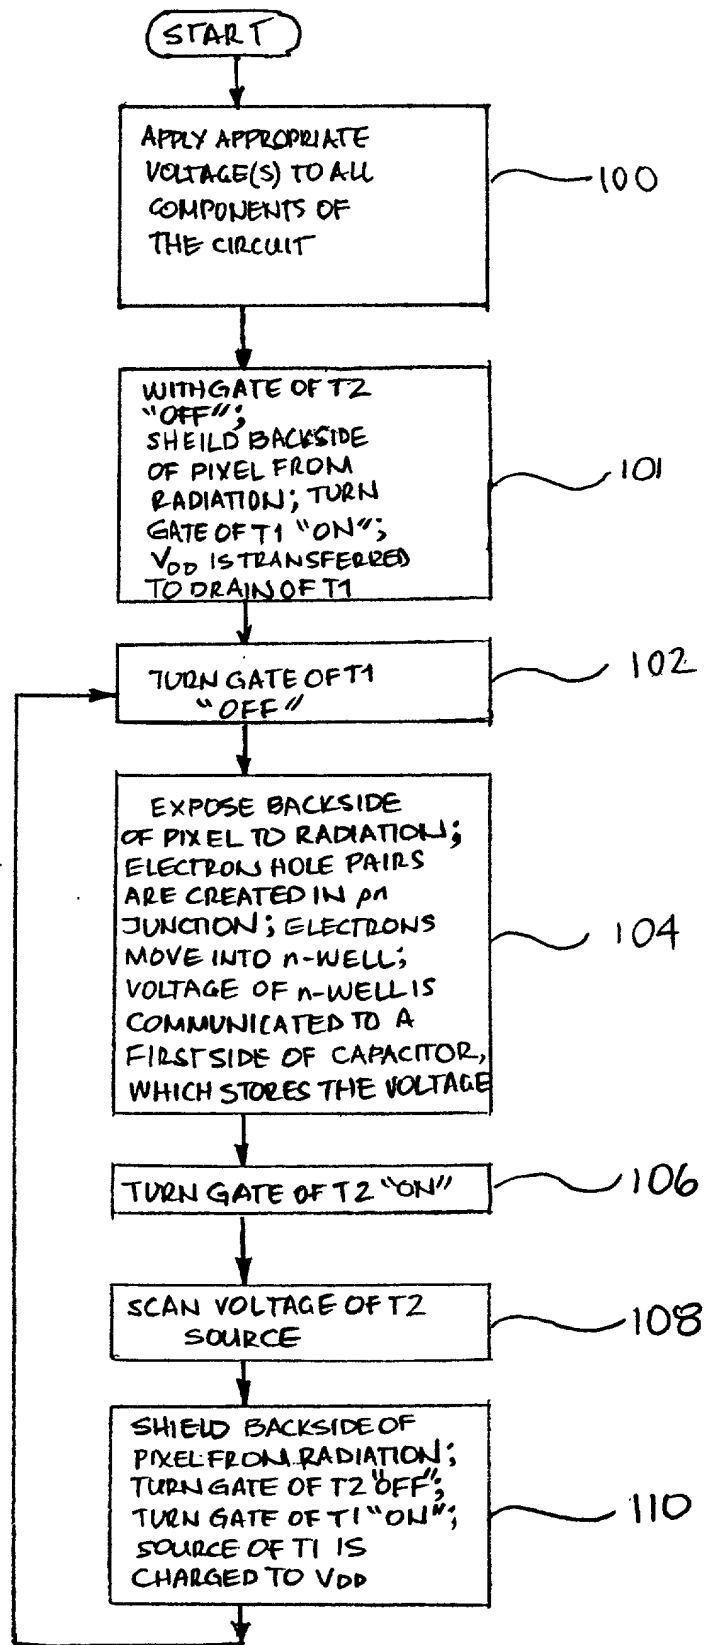


FIG. 3

60 →

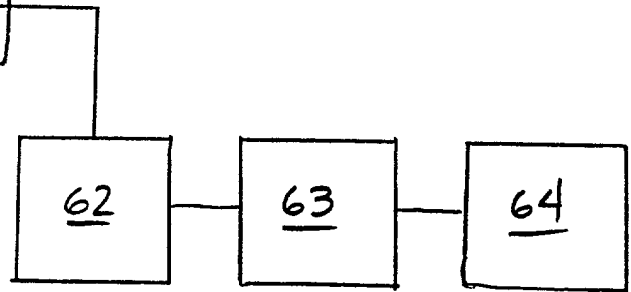

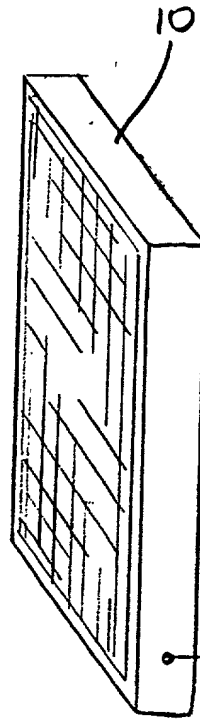
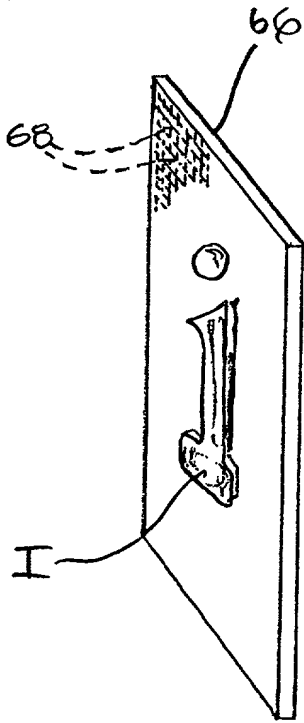


FIG. 4

607630-90690650

70 →


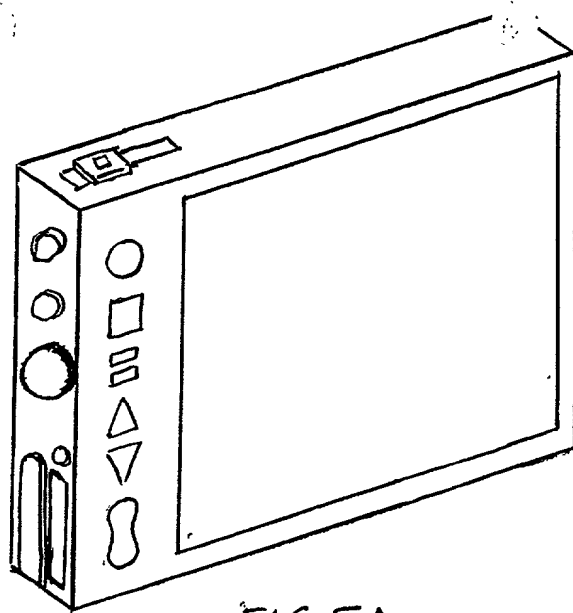


FIG. 5A



70 →

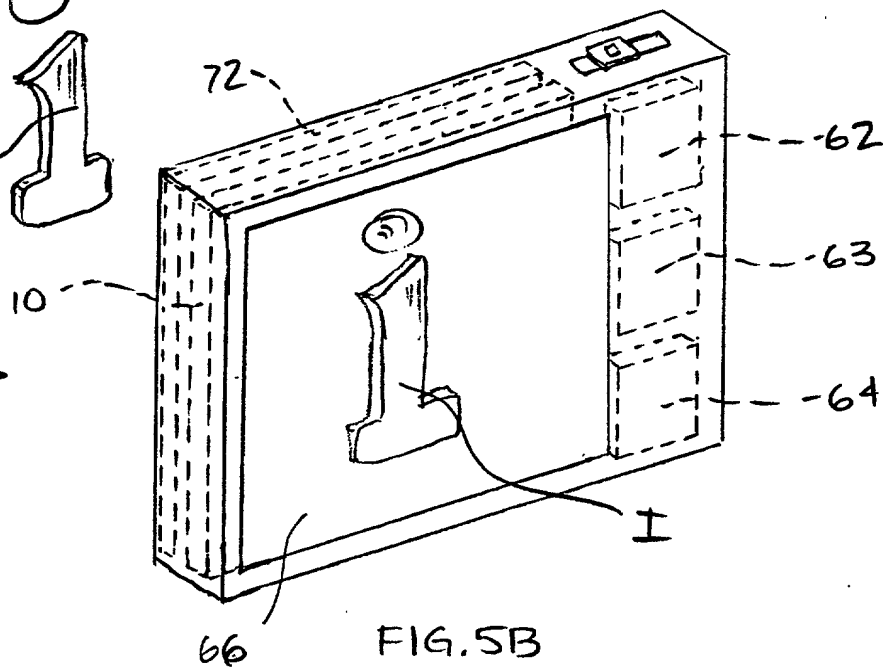


FIG. 5B